


**PROPOSED PAD ARRANGEMENT:**

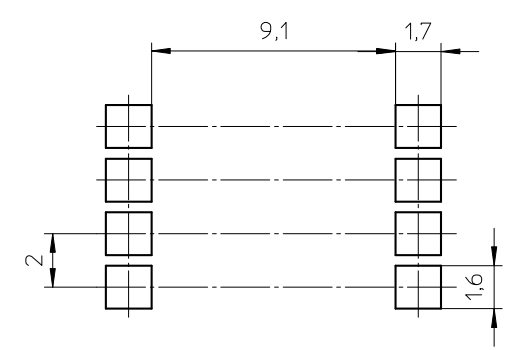

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.  
 UL file number: E54705 - UL94V-0  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60068-2-20 Test Ta, method 1B, 350°C - 3,5sec.  
 Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.  
 Min. winding area:  $2,8 \text{ mm}^2$ .  
 Mean length of turn: 18,4 mm.

CLASSNO.		CPVS-ER9,5-1S-8P-Z		4322 021 06131		03-02-20		08-01-25	
NAME NAAM	A.Wojtasz	SUPERS. VERV.		1	SP/SH BL/BL	112 - 001	069	A3	
MPA	CHECK CONTR.	DAT.	03-02-20	Property of Eigenaam van	© FERROXCUBE 2000				