


HOLE PATTERN:

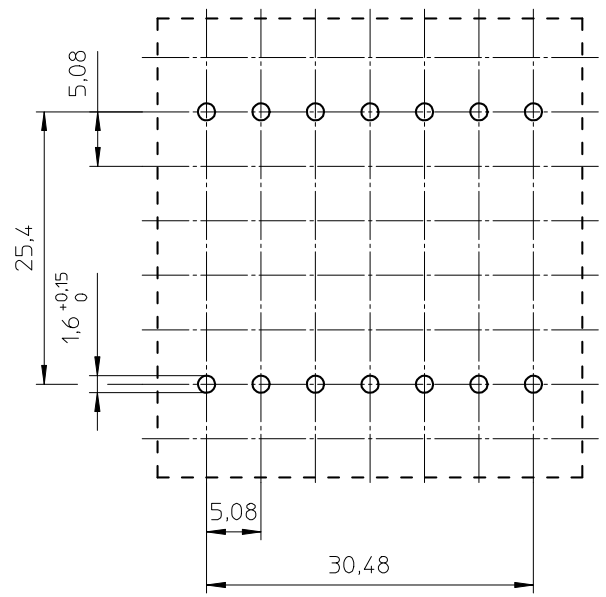

- Coil former material: Valox 420SEO (PBT), glass-reinforced.
- UL file number: E45329(R) - UL94V-0.
- Pin material: Copper plated steel wire, Sn plated.
- Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
- Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
- Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
- Min. winding area: 123 mm<sup>2</sup>.
- Mean length of turn: 60 mm.

CLASSNO.		CPH-ETD34-1S-14P		4322 021 01641		02-11-07	
98-10-09						2004-09-28	
						2008-06-19	
NAME NAAM	M.Tryngiel	SUPERS. VERV.		001	SPSH BL	112 - 001	069
MPA	CHECK CONTR.	DAT.	96-02-08	Property of Eigendom van	© FERROXCUBE 2008		
						A3	